




BAV21W

FEATURES

Fast Switching Speed
 Surface Mount Package Ideally Suited for Automatic Insertion
 For General Purpose Switching Applications
 High Conductance

MARKING: BAV19W: A8
 BAV20W: T2
 BAV21W: T3

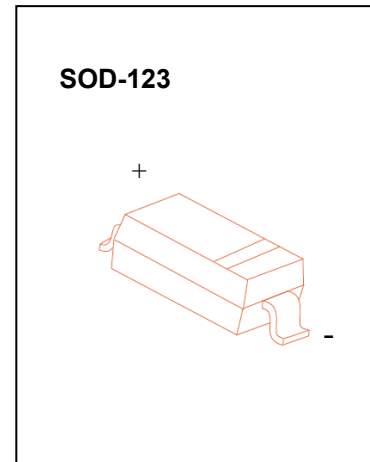

Maximum Ratings and Electrical Characteristics, Single Diode @T_A=25°C

Parameter	Symbol	BAV19W	BAV20W	BAV21W	Unit
Non-Repetitive Peak reverse voltage	V _{RM}	120	200	250	V
Peak Repetitive Peak reverse voltage	V _{RRM}				
Working Peak Reverse Voltage	V _{RWM}	100	150	250	V
DC Blocking Voltage	V _R				
RMS Reverse Voltage	V _{R(RMS)}	71	106	141	V
Forward Continuous Current	I _{FM}	400			mA
Average Rectified Output Current	I _O	200			mA
Peak forward surge current @=1.0ms @=1.0s	I _{FSM}	2.5 0.5			A
Repetitive Peak Forward Current	I _{FRM}	625			mA
Power Dissipation	P _d	500			mW
Thermal Resistance Junction to Ambient	R _{θJA}	250			°C/W
Storage temperature	T _{STG}	-65~+150			°C

Electrical Ratings @T_A=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V _{F1}			1.0	V	I _F =0.1A
	V _{F2}			1.25		I _F =0.2A
Reverse current	I _R			0.1	μA	V _R =100V
				0.1		V _R =150V
				0.1		V _R =200V
Capacitance between terminals	C _T			5	pF	V _R =0V, f=1MHz
Reverse Recovery Time	t _{rr}			50	ns	I _F =I _R =30mA I _{rr} =0.1X I _R , R _L =100Ω

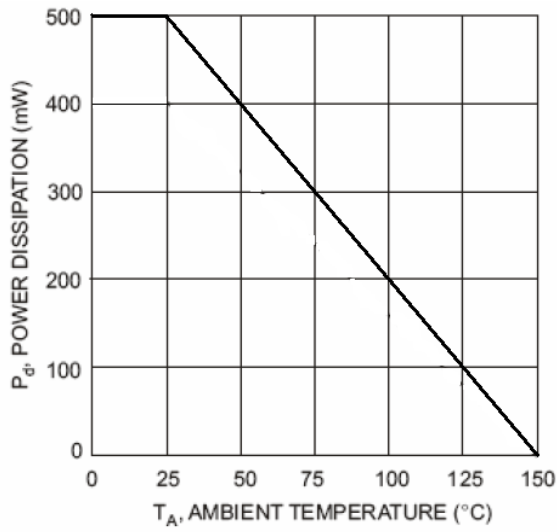


Fig. 1 Power Derating Curve

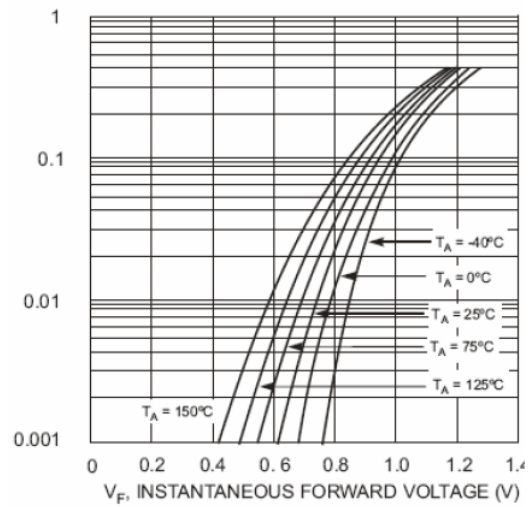


Fig. 2 Typical Forward Characteristics

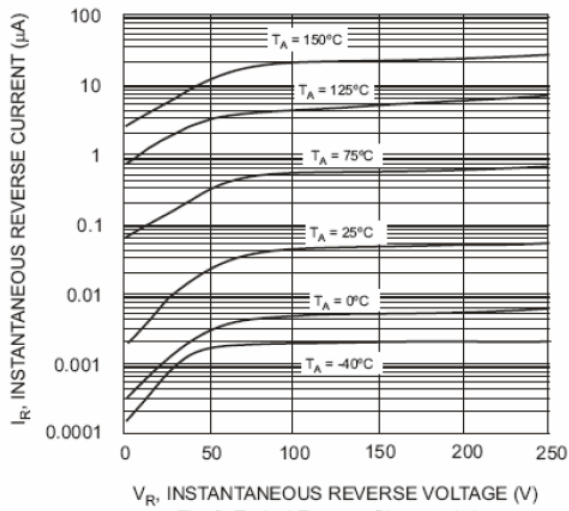


Fig. 3 Typical Reverse Characteristics

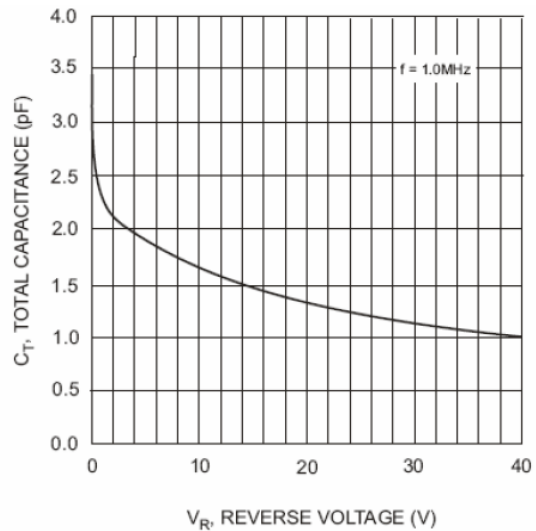


Fig. 4 Typical Capacitance vs. Reverse Voltage